



949 IRON GATE AND 918 ABBEY STONE

Proudly manufactured in America, Emergent LVT celebrates the vibrant, versatile spirit of our local communities. Appealing natural wood visuals are designed to fit any interior, providing a core collection of LVT styles to use for a variety of projects.

EMERGENT CLIC



Style Number	AH005
Product Type	Commercial Grade Luxury Vinyl Tile (Clic)
Gauge	4.5mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ 1 Enhanced Urethane
Colors Available	11
Size	5.84" x 47.8" (148.37mm x 1,214.12mm)
Packaging SF/CTN	19.39 sf/ctn (1.80m ² /ctn); 60 ctns/pallet; 30.6 lbs/ctn
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - at ±0.016 in. per linear foot
Thickness	ASTM F386 - Passes - ±0.005 in.
Flexibility	ASTM F137 - Passes - 1 in. / No crack or break
Dimensional Stability	ASTM F2199 - Passes - 6hrs@180F, 0.12%
Static Load Limit	ASTM F970 (modified) - 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Slip Resistance	ASTM D2047 - Passes - > 0.5
Resistance to Chemicals	ASTM F925 - Passes - No Change
Resistance to Light	ASTM F1515 - Passes - ΔF < 8
Resistance to Heat	ASTM F1514 - Passes - ΔF < 8
Critical Radiant Flux	ASTM E648 - Passes - > .45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Passes - < 450
Castor Chair Test	Passes
Installation	Floating LVT with Uniclic® Locking System
Adhesive	N/A
Optional Underlayment	Mohawk ActiveSound™
Certification	FloorScore® Certified
Warranty	Limited 10 Year Commercial Warranty Limited 25 Year Residential Warranty

EMERGENT

Style Number	AH006
Product Type	Commercial Grade Luxury Vinyl Tile
Gauge	2.5mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ 1 Enhanced Urethane
Colors Available	11
Size	6" x 48" (152.4mm x 1,219.2mm)
Packaging SF/CTN	36 sf/ctn (3.34m ² /ctn); 60 ctns/pallet; 29.7 lbs/ctn
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - at ±0.016 in. per linear foot
Thickness	ASTM F386 - Passes - ±0.005 in.
Flexibility	ASTM F137 - Passes - 1 in. / No crack or break
Dimensional Stability	ASTM F2199 - Passes - 6hrs@180F, 0.12%
Static Load Limit	ASTM F970 (modified) - 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Slip Resistance	ASTM D2047 - Passes - > 0.5
Resistance to Chemicals	ASTM F925 - Passes - No Change
Resistance to Light	ASTM F1515 - Passes - ΔF < 8
Resistance to Heat	ASTM F1514 - Passes - ΔF < 8
Critical Radiant Flux	ASTM E648 - Passes - > .45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Passes - < 450
Castor Chair Test	Passes
Installation	Glue Down
Adhesive	M95.0 Resilient Flooring Adhesive, MS160 Spray or M700 Pressure Sensitive Adhesive
Optional Underlayment	Mohawk AccuSound™
Certification	FloorScore® Certified
Warranty	Limited 10 Year Commercial Warranty Limited 25 Year Residential Warranty

Emergent Clic

Emergent

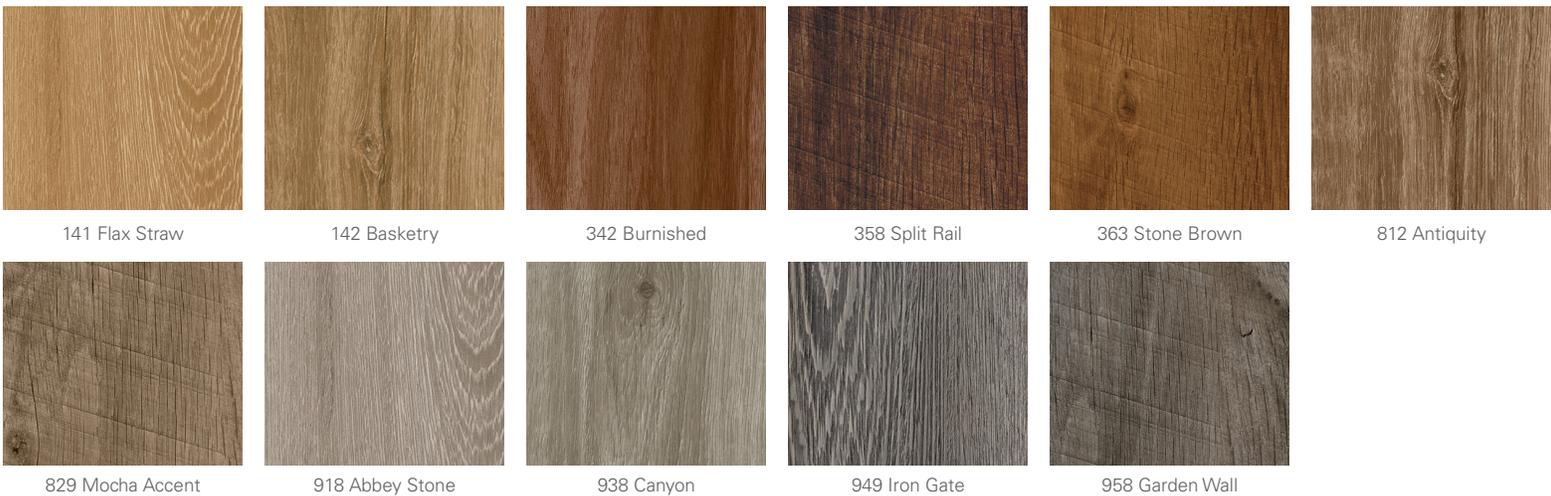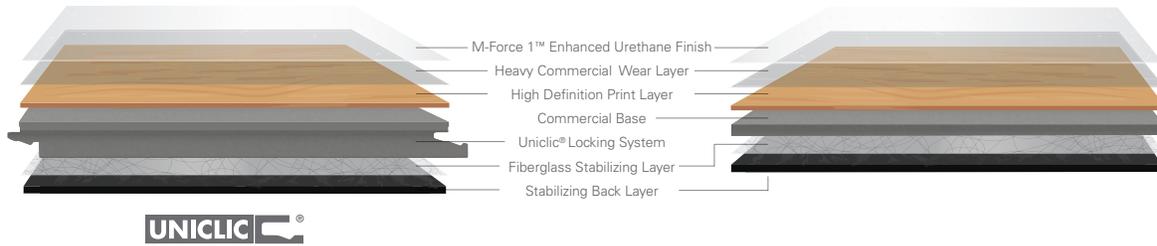

Up to 10,000 sq. ft. available within 10 business days or less